

K904



SOLID CONTROL HANDWHEEL WITH INDICATOR SEAT - WITH REVOLVING AND FOLDING HANDLE

Material:
Reinforced polyamide.
Oils and greases resistant.

Surface:
Satin.

Colour:
Black (RAL 9011).

Main Insert:
Zinc plated steel right through bored bush with H10 tolerance.

Side Insert:
Brass right through threaded bush.

Side handle:
Revolving and folding handle M136 (pag. M-16).


Indicator mountable:
Use gravitational indicators K650 or K660 series. The indicator can be used in a vertical position (horizontal axis machine). The indicator and the grub screw (d7) must be purchased separately. For further information on the indicators refer to page K-24/25. (*) With the adapter KS08050.T01 you can mount the indicator K650080.

For fixing system, or execution of keyway or square holes, please refer to the technical notes attached to the catalogue.

SPECIAL REQUESTS:

- It is possible to supply the inserts with d1 diameter by customers design, on request and for quantities.
- It is possible to supply the inserts in different materials, on request and for quantities.
- It is possible to supply the handwheels complete with indicators.
- Upon request and for quantities the indicator seat can be adjusted.

Matches diameters / Indicators:
d5=52,4 --> K650050
d5=87,4 --> K650080 o K660080
d5=124,4 --> K650120

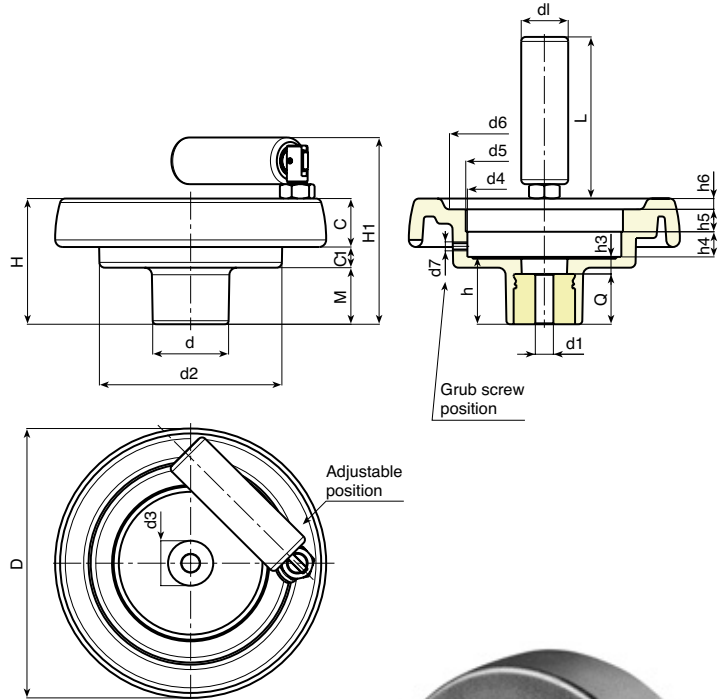

Version with zinc plated insert and H10 tolerance bore

art.	D	H	H1	d	d2	M	C	C1	d3	d4	d5 (K650)	d6	d7	h	h3	h4	h5	h6	dl	L	Dm	d1 H10	Q	Δg	
● K904087.T050D5.801P	86	53	77	32	62	21	17	15	20	50,8	52,4	63	M6	26,5	6,5	11,5	12	3	20	56	12	5,8	20	195	
● K904100.T050D6.801P	99	55,5	80	32	63	23,5	20,5	11,5	20	50,8	52,4	68	M6	29	9	11,5	12	3,5	20	56	12	6,8	20	210	
● K904130.T080D6.801P	129	64,5	94	42	100	27,5	23	14	29	85,7	87,4*	90	M6	34	10	13,5	12,5	5	25	76	20	6,8	24	420	
● K904150.T080D6.801P	149	69	104	42	101	31	25,5	12,5	29	85,7	87,4*	106	M6	37	9	13,5	12,5	6,5	26	89	20	6,8	28	580	
● K904175.T080D6.801P	175	72	107	40	115	28,5	32	11,5	25	85,7	87,4*	126,5	M6	38	10	12,5	14	8	26	89	20	6,8	28	800	
● K904200.T120D6.801P	199	71	106	46	137	24	32	15	29	123	124,4	144	M6	34	11	13,5	12,5	10	26	97	22	6,8	23	970	

Attention: bore d1 (H10 tolerance) could be produced by request, with 50 pieces minimum.

Dm = It's possible to increase the hole, by boring, until Dm (enlarge).

Q2 = by request.

dv = 36 mm. (K901130 dv= 32 mm.)

Version with black-oxide insert and H7 tolerance bore

art.	D	H	H1	d	d2	M	C	C1	d3	d4	d5 (K650)	d6	d7	h	h3	h4	h5	h6	dl	L	Dm	d1 H7	Q	Δg	
● K904087.T050D..01PZB	86	53	77	32	62	21	17	15	20	50,8	52,4	63	M6	26,5	6,5	11,5	12	3	20	56	12	A.R.	20	195	
● K902100.T050D..01PZB	99	55,5	80	32	63	23,5	20,5	11,5	20	50,8	52,4	68	M6	29	9	11,5	12	3,5	20	56	12	A.R.	20	210	
● K904130.T080D..01PZB	129	64,5	94	42	100	27,5	23	14	29	85,7	87,4*	90	M6	34	10	13,5	12,5	5	25	76	20	A.R.	24	420	
● K904150.T080D..01PZB	149	69	104	42	101	31	25,5	12,5	29	85,7	87,4*	106	M6	37	9	13,5	12,5	6,5	26	89	20	A.R.	28	580	
● K904175.T080D..01PZB	175	72	107	40	115	28,5	32	11,5	25	85,7	87,4*	126,5	M6	38	10	12,5	14	8	26	89	20	A.R.	28	800	
● K904200.T120D..01PZB	199	71	106	46	137	24	32	15	29	123	124,4	144	M6	34	11	13,5	12,5	10	26	97	22	A.R.	23	970	

Attention: replace the two places in the code .. with the hole diameter required - 50 pieces minimum.

dv = 36 mm. (K901130 dv= 32 mm.)

Dm = It's possible to increase the hole, by boring, until Dm (enlarge).

A.R. = by request

Q2 = by request.