

# M140

## HANDLE WITH THREADED STUD



### Materials:

Reinforced polyamide.  
Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:


Black (RAL 9011).

### Inserts:

Galvanised steel threaded stud (thread tolerance 6g).

### Special Requests:

- Upon request and for special quantities inserts can be supplied with customised lengths.
- Upon request and for special quantities inserts can be supplied in different materials.
- Upon request and for special quantities available in the colours indicated in the chart [page ].

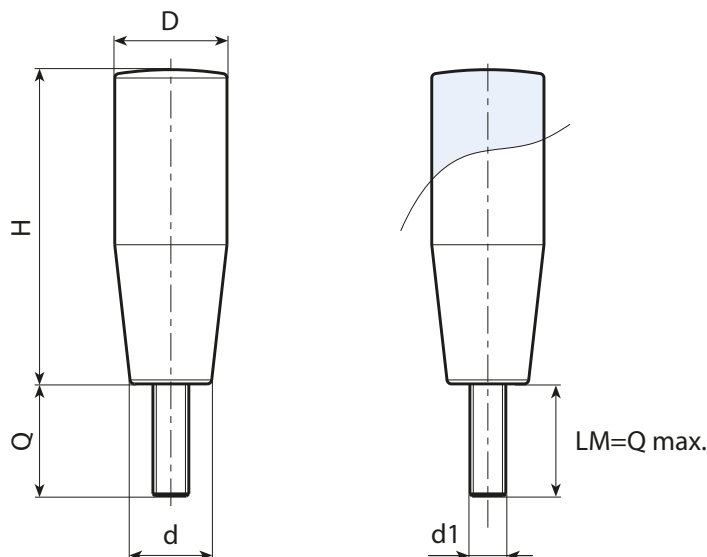

Stock availability as % (🛒)  
90% (●) - 40% (●) - 5% (●)

art.	H	D	d	LM	d1 <sub>6g</sub>	Q	🛒
M14027.TM04X2001	27	14	11,5	30	M4	20	10
M14027.TM05X2001	27	14	11,5	30	M5	20	15
M14027.TM06X2001	27	14	11,5	30	M6	20	20
M14040.TM05X2001	40	18,5	15,5	30	M5	20	20
M14040.TM06X..01	40	18,5	15,5	30	M6	10-16-25	18-19-21
M14050.TM06X..01	50,5	20	15	35	M6	10-20	24-27
M14050.TM08X..01	50,5	20	15	35	M8	10-15-20	34-32-30
M14060.TM06X2001	60,5	23,5	18	35	M6	20	40
M14060.TM08X..01	60,5	23,5	18	35	M8	10-20-30	34-42-50
M14060.TM10X1501	60,5	23,5	18	35	M10	15	40
M14070.TM08X..01	70	25	18,5	35	M8	10-20-30	51-54-57
M14080.TM08X..01	79	26	21,5	35	M8	10-20-25	74-77-78,5
M14080.TM10X..01	79	26	21,5	35	M10	10-20-30	84-86-88
M14090.TM08X..01	89,5	28	23,5	35	M8	10-20	74-77
M14090.TM10X..01	89,5	28	23,5	35	M10	10-20-30	95-100-105
M14090.TM12X..01	89,5	28	23,5	40	M12	20-30	104-112
M140110.TM12X2001	109	32,5	27	80	M12	20	162

Enter the selected stud length in place of the two dots . . in the item code. Customised stud length available for a minimum of 100 pieces.

A.R. = Upon request, for a minimum of 100 pieces.

LM = Maximum mouldable length.