

# O432

+135°  
-30°

PA6  
+G.F.

UL94  
HB

RoHS  
COMPLIANT

## FLAT HINGE WITH THREADED STUD AND THREADED HOLE INSERT

### Materials:

Reinforced polyamide.  
Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:



Black (RAL 9011).

### Inserts:

Galvanised steel pin.  
Brass insert with female threaded hole (thread tolerance 6H).  
Galvanised steel threaded stud (thread tolerance 6g).

### Special Requests:

- Upon request and for special quantities inserts can be supplied in different materials.
- Upon request and for special quantities available in the colours indicated in the chart [page].

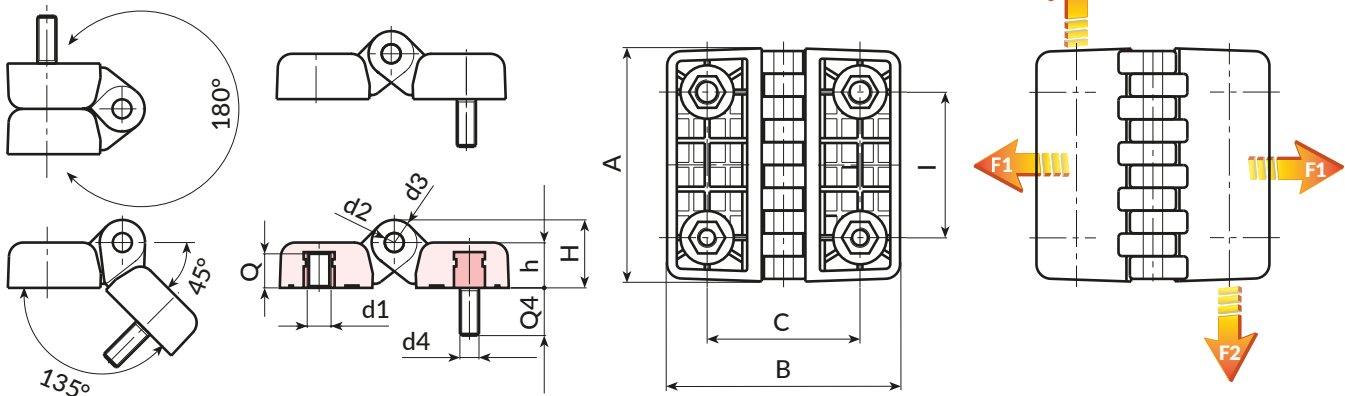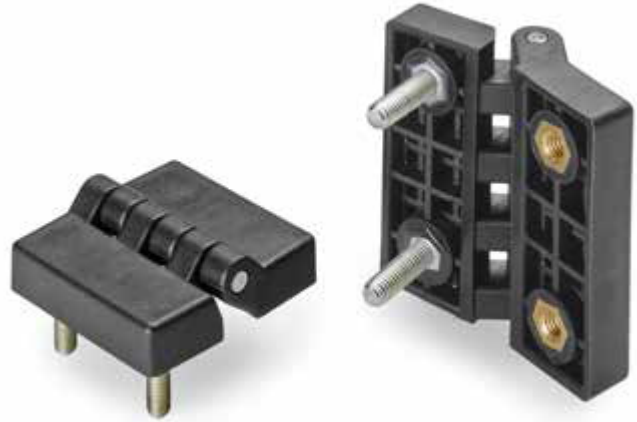

Stock availability as % (🛒)  
90% (●) - 40% (●) - 5% (●)

🛒	art.	l	C	A	B	h	H	d2	d3	d1-d4	Q	Q4	📦	F1 (N)	F2 (N)
●	O43230.TM0501	30	30	48	48	10.5	15.5	5	10	M05	7	15	40	1850	1350
●	O43230.TM0601	30	30	48	48	10.5	15.5	5	10	M06	7	15	41	1850	1350
●	O43240.TM0601	40	40	64	64	13	19	5	12	M06	8,5	20	73	4000	1600
●	O43240.TM0801	40	40	64	64	13	19	5	12	M08	8,5	20	85	4000	1600
●	O43260.TM0801	60	63	96	96	19	28.5	8	19	M08	14	20	240	3100	1400
●	O43260.TM1001	60	63	96	96	19	28.5	8	19	M10	14	20	250	3100	1400