

P310



AVP

NR

UL94
HB



CYLINDRICAL ANTI-VIBRATION MOUNT WITH DOUBLE THREADED HOLE

Materials:

Natural rubber (NR),

Rubber hardness:

Hardness 55 Shore A (tolerance $\pm 5\%$).

Surface finish:

Smooth.

Colour:


Black (RAL 9011).

Inserts:

- (1) Galvanised boron steel insert with female threaded hole (thread tolerance 6H).
- (2) Galvanised weldable steel washer.

Special requests:

- Upon request and for a minimum quantity of 100 pieces anti-vibration mounts can be supplied with hardness 45 or 70 Shore A.
- Upon request and for a minimum quantity of 100 pieces anti-vibration mounts can be supplied in different materials:
- P311= SBR
- P312= NBR
- P313= EPDM

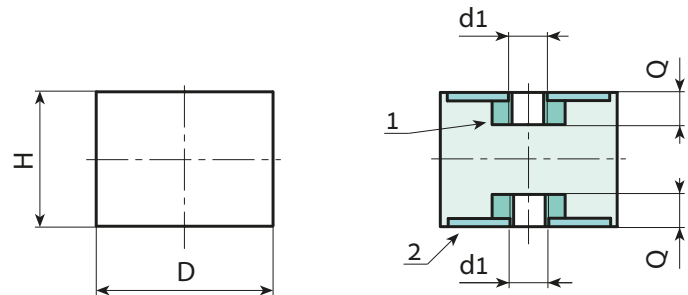

Stock availability as % (🛒)
90% (●) - 40% (●) - 5% (●)

🛒	Art.	D	H	d1 _{6H}	Q	g	Compression stiffness (N/mm)
●	P310015.F15M0455	15	15	M4	4	4	66.1
●	P310015.F20M0455	15	20	M4	4	9	52.2
●	P310020.F20M0655	20	20	M6	6	17	91.7
●	P310020.F25M0655	20	25	M6	6	19	42
●	P310025.F20M0655	25	20	M6	6	26	152.7
●	P310025.F25M0655	25	25	M6	6	28	105.1
●	P310025.F30M0655	25	30	M6	6	31	78.7
●	P310030.F20M0855	30	25	M8	8	42	223.3
●	P310030.F30M0855	30	30	M8	8	52	117.4
●	P310030.F40M0855	30	40	M8	8	59	99
●	P310040.F30M0855	40	30	M8	8	83	190.1
●	P310040.F40M1055	40	40	M10	10	102	133.7
●	P310050.F30M1055	50	30	M10	10	132	393
●	P310050.F40M1055	50	40	M10	10	146	258.4
●	P310050.F50M1055	50	50	M10	10	172	171.3
●	P310060.F30M1055	60	30	M10	10	255	685.3
●	P310060.F40M1055	60	40	M10	10	222	405.9
●	P310070.F40M1055	70	40	M10	10	310	590.7
●	P310075.F40M1255	75	40	M12	12	365	671
●	P310100.F40M1655	100	40	M16	16	678	1934.5
●	P310100.F55M1655	100	55	M16	16	855	9035.6
●	P310100.F75M1655	100	75	M16	16	997	564.3

Arbel Agencies LTD.



11 Ba'alei Hamelacha st. Qiryat Bialik P.O.B 1095, ZIP 2751311, ISRAEL
+972(0)48736969 ☎ +972(0)48730708 📠 info@arbel-ltd.com 📧 www.arbel-ltd.com 🌐

