

# P325



## CONICAL ANTI-VIBRATION MOUNT WITH THREADED STUD

### Materials:

Natural rubber (NR),

### Rubber hardness:

Hardness 55 Shore A (tolerance  $\pm 5\%$ ).

### Surface finish:

Smooth.

### Colour:


Black (RAL 9011).

### Inserts:

- (1) Galvanised boron steel threaded stud (thread tolerance 6g).
- (2) Galvanised weldable steel washer.

### Special requests:

- Upon request and for a minimum quantity of 100 pieces anti-vibration mounts can be supplied with hardness 45 or 70 Shore A.
- Upon request and for a minimum quantity of 100 pieces anti-vibration mounts can be supplied in different materials:
  - P326= SBR
  - P327= NBR
  - P328= EPDM

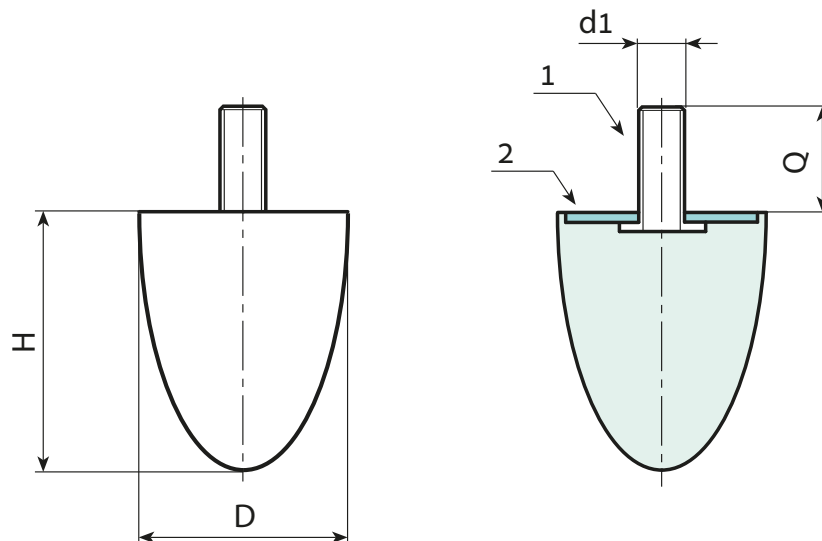

Stock availability as % (🛒)  
 90% (●) - 40% (●) - 5% (●)

🛒	Art.	D	H	d1 <sub>6g</sub>	Q	📦
●	P325020.F24M06X1855	20	24	M6	18	10
●	P325025.F25M06X1855	25	25	M8	18	12
●	P325030.F36M08X2055	30	36	M8	20	35
●	P325035.F40M08X2355	35	40	M8	23	47
●	P325050.F60M10X2855	50	60	M10	28	117
●	P325050.F67M10X2855	50	67	M10	28	125