

# P532



## FULL STEEL MOUNTING FOOT WITH ARTICULATED STEM TYPE B - BALL R12.4

### Materials:

#### P532:

Turned free-cutting steel mounting foot base.

#### P532CIN:

Turned stainless steel mounting foot base (Aisi 303).

### Surface finish:

Smooth.

### Colour:

#### P532:

Standard blue galvanising.

#### P532CIN:

Natural.

### Inserts:

#### P532:

Galvanised steel threaded and articulated stem (ball R.12.5) with milled seat for wrench (type B) (thread tolerance 6g).

#### P532CIN:


Stainless steel threaded and articulated stem (ball R.12.5) with milled seat for wrench (type B) (Aisi 303) (thread tolerance 6g).

### Stem fixing method:

The stem cannot be disassembled. The ball cannot be removed as the edge of its seat has been pressed in.

### Special requests:

- Upon request and for special quantities inserts can be supplied with customised lengths.

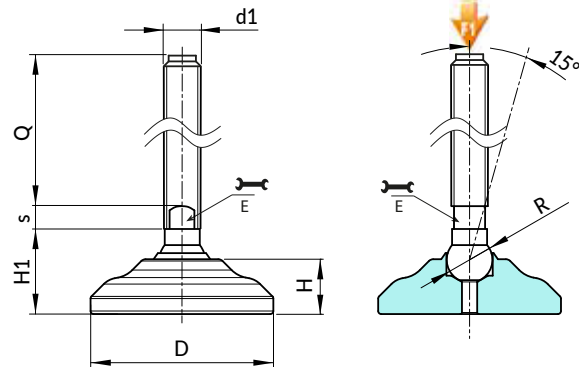

Version P532: Galvanised steel mounting foot with stem type B (with milled seat for wrench) and ball R12.5

Stock availability as % (🛒)  
90% (●) - 40% (●) - 5% (●)

Art.	D	H	H1	E	s	R	d1 <sub>6g</sub>	Q	📦	F1 (kN)
P53260.VZM16X..	60	18	28	13	7	12.5	M16	50-70-90-110-130-150-170	338-364-390-416-442-468-494	23

Version P532CIN: Stainless steel mounting foot with stem type B (with milled seat for wrench) and ball R12.5



Art.	D	H	H1	E	s	R	d1 <sub>6g</sub>	Q	📦	F1 (kN)
P53260.INM16X..CIN	60	18	28	13	7	12.4	M16	50-70-90-110-130-150-170	338-364-390-416-442-468-494	23

Enter the selected stud length in place of the two dots . . in the item code. Customised stud length available for a minimum of 100 pieces.

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.

