

# P820



## MOUNTING AND THRUST FOOT WITH THREADED AND ARTICULATED STEM

### Materials:

Reinforced polyamide.  
Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:

Black (RAL 9011).


### Inserts:

Galvanized steel threaded stem with ball joint (thread tolerance 6g), with milled seat for adjustment wrench.

### Special requests:

- Upon request and for special quantities inserts can be supplied with customised lengths.
- Upon request and for special quantities inserts can be supplied in different materials.
- Upon request and for special quantities the foot can be supplied in Orange (RAL 2004).

**Notes:** The base of mounting foot P820 can be used in combination with other handgrips in order to obtain a greater closing surface or thrust.

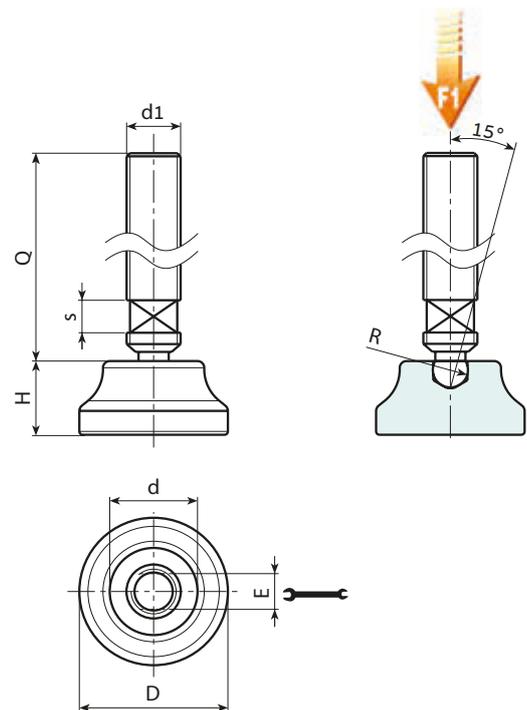

Stock availability as % (🛒)  
90% (●) - 40% (●) - 5% (●)

🛒	Art.	D	H	d	E	s	R	d1 <sub>6g</sub>	Q	g	F1 (kN)
●	P820019.TM08X..01	19	10	13	6	6	6.1	M8	50-90	20-32	4
●	P820022.TM08X..01	22	11	15	6	6	6.1	M8	50-90	21-33	4
●	P820022.TM10X..01	22	11	15	8	6	7.8	M10	50-90	31-50	4
●	P820026.TM08X..01	26	12.5	18	6	6	6.1	M8	50-90	24-36	4
●	P820026.TM10X..01	26	12.5	18	8	6	7.8	M10	50-90	34-53	4
●	P820026.TM12X..01	26	12.5	18	10	6	9.4	M12	50-90	46-73	4

Enter the selected stud length in place of the two dots . . in the item code.

Customised stud length available for a minimum of 150 pieces.

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.