

P908



SMALL MOUNTING FOOT WITH STEEL STEM TYPE A - BALL R15 AND NON-SLIP BASE

Materials:

Reinforced polyamide. Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

Version P908:

Galvanised steel threaded and articulated stem (ball R.15) with hexagonal base (thread tolerance 6g).

Version P908CIN:


Stainless steel threaded and articulated stem (ball R.15) with hexagonal base (Aisi 303) (thread tolerance 6g).

Non-slip base:

Non-slip base in thermoplastic rubber SBS 75 Shore, black RAL 9011. Resistant to oils and greases.

Special requests:

- Upon request and for special quantities inserts can be supplied with customised lengths.
- Upon request and for special quantities the foot can be supplied in Orange (RAL 2004).

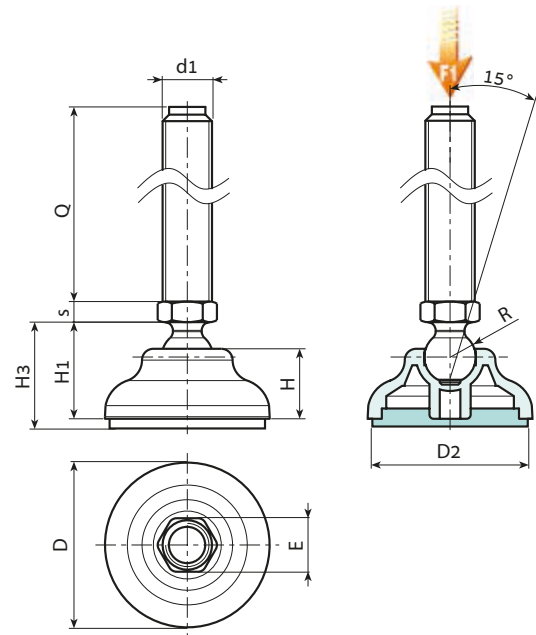

Version P908: Mounting foot with stem type A (with hexagonal base) and ball R15 - with SBS non-slip base

Stock availability as % (🛒)
90% (●) - 40% (●) - 5% (●)

Art.	D	D2	H	H1	H3	E	s	R	d1 _{6g}	Q	g	F1 (kN)
P90840.TM12X..01	40	34	17	23	26	16	6.5	15	M12	50-70-90-110	80-93-106-119	13
P90840.TM14X..01	40	34	17	23	26	16	6.5	15	M14	50-70-90-110-150	95-119-154-167-193	13
P90840.TM16X..01	40	34	17	23	26	16	6.5	15	M16	50-70-90-110-130-150-170-190	114-146-178-210-242-274-306-348	13
P90850.TM12X..01	50	43	18	24	27	16	6.5	15	M12	50-70-90-110	86-99-112-125	13
P90850.TM14X..01	50	43	18	24	27	16	6.5	15	M14	50-70-90-110-150	101-125-160-173-199	13
P90850.TM16X..01	50	43	18	24	27	16	6.5	15	M16	50-70-90-110-130-150-170-190	120-152-184-216-248-280-312-354	13
P90860.TM12X..01	60	53	20	26	29	16	6.5	15	M12	50-70-90-110	109-122-135-148	13
P90860.TM14X..01	60	53	20	26	29	16	6.5	15	M14	50-70-90-110-150	124-148-183-196-222	13
P90860.TM16X..01	60	53	20	26	29	16	6.5	15	M16	50-70-90-110-130-150-170-190	143-175-207-239-271-303-335-377	13

Version P908CIN: Foot with stem type A (with hexagonal base) - ball R15 - stainless steel - with SBS non-slip base

INOX

Art.	D	H	H1	E	s	R	d1 _{6g}	Q	g	F1 (kN)
P90840.TM12X..01CIN	40	17	23	16	6.5	15	M12	70-90-110	93-106-119	13
P90840.TM14X..01CIN	40	17	23	16	6.5	15	M14	70-110-130	119-167-180	13
P90840.TM16X..01CIN	40	17	23	16	6.5	15	M16	50-70-90-110-130-150-170-190	114-146-178-210-242-274-306-348	13
P90850.TM12X..01CIN	50	18	24	16	6.5	15	M12	70-90-110	99-12-125	13
P90850.TM14X..01CIN	50	18	24	16	6.5	15	M14	70-110-130	125-173-186	13
P90850.TM16X..01CIN	50	18	24	16	6.5	15	M16	50-70-90-110-130-150-170-190	120-152-184-216-248-280-312-354	13
P90860.TM12X..01CIN	60	20	26	16	6.5	15	M12	70-90-110	122-135-148	13
P90860.TM14X..01CIN	60	20	26	16	6.5	15	M14	70-110-130	148-196-209	13
P90860.TM16X..01CIN	60	20	26	16	6.5	15	M16	50-70-90-110-130-150-170-190	143-175-207-239-271-303-335-377	13

Enter the selected stud length in place of the two dots . . in the item code. Customised stud length available for a minimum of 100 pieces.

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.

Arbel Agencies LTD.



11 Ba'alei Hamelacha st. Qiryat Bialik P.O.B 1095, ZIP 2751311, ISRAEL
+972(0)48736969 ☎ +972(0)48730708 📠 info@arbel-ltd.com 📧 www.arbel-ltd.com 🌐

