

# P917



## MOUNTING FOOT WITH GROUND FIXING AND STEEL ARTICULATED STEM TYPE B - BALL R15 AND NON-SLIP BASE

### Materials:

Reinforced polyamide. Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:

Black (RAL 9011).

### Inserts:

#### P917:

Galvanised steel threaded and articulated stem (ball R.15) with milled seat for wrench (type B) (thread tolerance 6g).

#### P917CIN:

Stainless steel threaded and articulated stem (ball R.15) with milled seat for wrench (type B) (Aisi 303) (thread tolerance 6g).

### Non-slip base:


Non-slip base in thermoplastic rubber SBS 75 Shore, black RAL 9011. Resistant to oils and greases. Push-fit assembly.

### Ground fixing:

The mounting foot is supplied with closed holes for anchoring to the ground. To open them pierce the plastic membrane (see drawing).

### Special requests:

- Upon request and for special quantities inserts can be supplied with customised lengths.
- Upon request and for special quantities the foot can be supplied in Orange (RAL 2004).

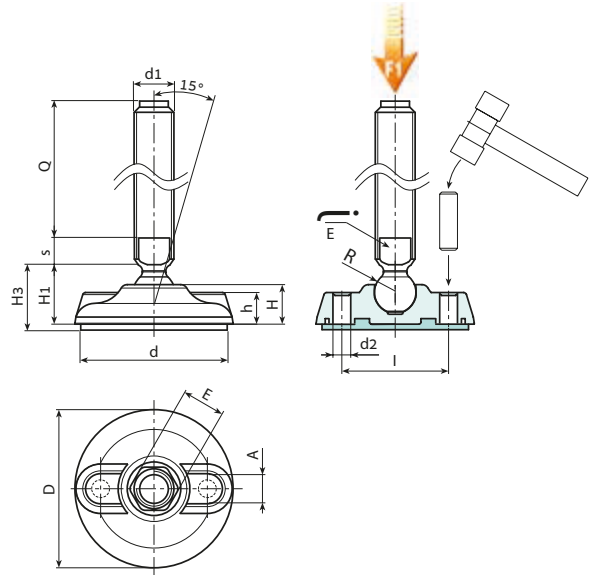

Version P917: Mounting foot with stem type B (with milled seat for wrench) and ball R15 - with SBS non-slip base Stock availability as % (🛒)  
90% (●) - 40% (●) - 5% (●)

Art.	D	H	I	H1	H3	h	A	E	s	d2	d	R	d1 <sub>6g</sub>	Q	g	F1-kN
P917080.TM20X..01	80	20	54	25.5	28.5	16	20	16	7	9	75	15	M20	50-70-90-110-130-150-170-190-210	191-231-271-311-351-391-431-470-510	17
P917105.TM20X..01	105	22	74	28	32	18.5	21	16	7	11	101	15	M20	50-70-90-110-130-150-170-190-210	285-325-365-405-445-485-525-565-605	17
P917130.TM20X..01	130	24	99	30	35	20	21	16	7	13	126	15	M20	50-70-90-110-130-150-170-190-210	396-436-476-516-556-596-636-675-715	17
P917080.TM24X..01	80	20	54	25.5	28.5	16	20	19	7	9	75	15	M24	150-170-190-210	589-650-710-770	17
P917105.TM24X..01	105	22	74	28	32	18.5	21	19	7	11	101	15	M24	150-170-190-210	682-742-800-860	17
P917130.TM24X..01	130	24	99	30	35	20	21	19	7	13	126	15	M24	150-170-190-210	790-850-910-970	17

Version P917CIN: Mounting foot with stem type B - stainless steel - (with milled seat for wrench) and ball R15 - with SBS non-slip base

**INOX**

Art.	D	H	I	H1	H3	h	A	E	s	d2	d	R	d1 <sub>6g</sub>	Q	g	F1-kN
P917080.TM20X..01CIN	80	20	54	25.5	28.5	16	20	16	7	9	75	15	M20	70-90-130-150-190-210	231-271-351-391-470-510	17
P917105.TM20X..01CIN	105	22	74	28	32	18.5	21	16	7	11	101	15	M20	70-90-130-150-190-210	325-365-445-485-565-605	17
P917130.TM20X..01CIN	130	24	99	30	35	20	21	16	7	13	126	15	M20	70-90-130-150-190-210	436-476-556-596-675-715	17
P917080.TM24X..01CIN	80	20	54	25.5	28.5	16	20	19	7	9	75	15	M24	110-150-190-210	469-589-710-770	17
P917105.TM24X..01CIN	105	22	74	28	32	18.5	21	19	7	11	101	15	M24	110-150-190	562-682-800	17
P917130.TM24X..01CIN	130	24	99	30	35	20	21	19	7	13	126	15	M24	110-150-190	670-790-910	17

Enter the selected stud length in place of the two dots . . in the item code. Customised stud length available for a minimum of 100 pieces.

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.



Arbel Agencies LTD.

11 Ba'alei Hamelacha st. Qiryat Bialik P.O.B 1095, ZIP 2751311, ISRAEL

+972(0)48736969 ☎ +972(0)48730708 📠 info@arbel-ltd.com 📧 www.arbel-ltd.com 🌐

