

P918



MOUNTING FOOT WITH GROUND FIXING AND STEEL ARTICULATED STEM TYPE B - BALL R24 AND NON-SLIP BASE

Materials:

Reinforced polyamide. Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

P918:

Galvanised steel threaded and articulated stem (ball R.24) with milled seat for wrench (type B) (thread tolerance 6g).

P918CIN:

Stainless steel threaded and articulated stem (ball R.24) with milled seat for wrench (type B) (Aisi 303) (thread tolerance 6g).

Non-slip base:


Non-slip base in thermoplastic rubber SBS 75 Shore, black RAL 9011. Resistant to oils and greases. Push-fit assembly.

Ground fixing:

The mounting foot is supplied with closed holes for anchoring to the ground. To open them pierce the plastic membrane (see drawing).

Special requests:

- Upon request and for special quantities inserts can be supplied with customised lengths.
- Upon request and for special quantities the foot can be supplied in Orange (RAL 2004).

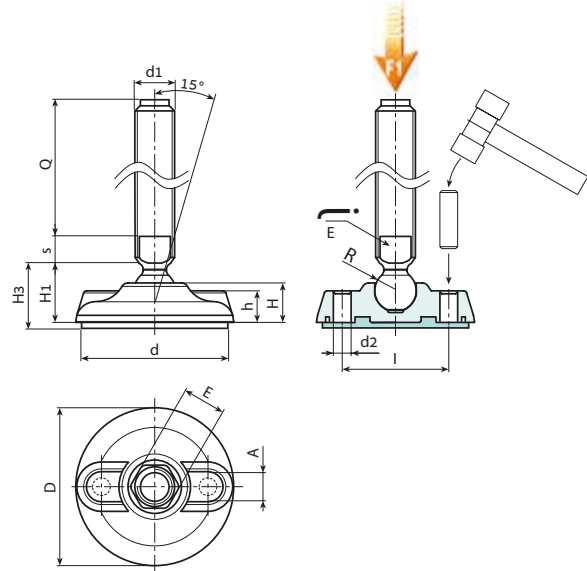

Version P918: Mounting foot with stem type B (with milled seat for wrench) and ball R24 - with SBS non-slip base Stock availability as % (🛒)
90% (●) - 40% (●) - 5% (●)

Art.	D	H	I	H1	H3	h	A	E	s	d2	d	R	d1 _{6g}	Q	g	F1 (kN)
P918080.TM24X..01	80	20	54	25.5	28.5	16	20	19	10	9	75	24	M24	110-130-150-170	469-529-589-650	25
P918080.TM30X..01	80	20	54	25.5	28.5	16	20	27	12	9	75	24	M30	110-130-150-170-190-210	652-747-842-935-1030-1125	25
P918105.TM24X..01	105	22	74	28	32	18.5	21	19	10	11	101	24	M24	110-130-150-170	562-622-682-742	25
P918105.TM30X..01	105	22	74	28	32	18.5	21	27	12	11	101	24	M30	110-130-150-170-190-210	745-840-934-1030-1125-1220	25
P918130.TM24X..01	130	24	99	30	35	20	21	19	10	13	126	24	M24	110-130-150-170	670-730-790-850	25
P918130.TM30X..01	130	24	99	30	35	20	21	27	12	13	126	24	M30	110-130-150-170-190-210	853-948-1043-1140-1235-1330	25

Version P918CIN: Foot with stem type B - stainless steel - (with milled seat for wrench) and ball R24 - with SBS non-slip base



Art.	D	H	I	H1	H3	h	A	E	s	d2	d	R	d1 _{6g}	Q	g	F1 (kN)
P918080.TM24X..01CIN	80	20	54	25.5	28.5	16	20	19	10	9	75	24	M24	110-130-150-190	469-529-589-709	25
P918080.TM30X..01CIN	80	20	54	25.5	28.5	16	20	27	12	9	75	24	M30	130-170-210	747-935-1125	25
P918105.TM24X..01CIN	105	22	74	28	32	18.5	21	19	10	11	101	24	M24	110-130-150-190	562-622-682-802	25
P918105.TM30X..01CIN	105	22	74	28	32	18.5	21	27	12	11	101	24	M30	130-170-210	840-1030-1220	25
P918130.TM24X..01CIN	130	24	99	30	35	20	21	19	10	13	126	24	M24	110-130-150-190	670-730-790-910	25
P918130.TM30X..01CIN	130	24	99	30	35	20	21	27	12	13	126	24	M30	130-170-210	948-1140-1330	25

Enter the selected stud length in place of the two dots . . in the item code. Customised stud length available for a minimum of 100 pieces.

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.



Arbel Agencies LTD.

11 Ba'alei Hamelacha st. Qiryat Bialik P.O.B 1095, ZIP 2751311, ISRAEL

+972(0)48736969 ☎ +972(0)48730708 📠 info@arbel-ltd.com 📧 www.arbel-ltd.com 🌐

