

S602TG10



SPOOL HOLDER WITHOUT STUD FOR MIG/MAG WELDING WIRE COIL

Materials:

(1-3-4-6) Reinforced polyamide.
Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

(2) Galvanised steel spring.
(5) Galvanised steel insert with threaded holes.
(7) Thermoplastic TPV rubber washer, 75 Shore.
(8) Galvanised steel washer.
(9) Galvanised steel hexagon head screw, left-hand/right-hand thread. The choice must be made according to the motor rotation direction of the wire feeder.

Special requests:

- For customers using spool holder S602116 who want to mount a wire coil with width Q=55, plastic adapter S604 can be provided upon request. To be ordered separately.
- Upon request, adapter S816 can be supplied for metal coils without internal frame. To be ordered separately.



S604:



S602TG10+S816



Version for plastic coil with hole: Ø 53 mm - width 55 mm

Stock availability as % (🛒)
90% (●) - 40% (●) - 5% (●)



🛒	art.	D	HT	d	d1	d2	d3	d4	d5	h	h1	h2	h3	h4	E	Q	R	📦
●	S602074.TG10X1001DX	112	102	68	50.5	28	10	M10 DX	M10 DX	9	17	8	7	1.7	13	55	44	350
●	S602074.TG10X1001SX	112	102	68	50.5	28	10	M10 DX	M10 SX	9	17	8	7	1.7	13	55	44	350

Version for plastic coil with hole: Ø 53 mm - width 100 mm

🛒	art.	D	HT	d	d1	d2	d3	d4	d5	h	h1	h2	h3	h4	E	Q	R	📦
●	S602116.TG10X1001DX	112	140	68	50.5	28	10	M10 DX	M10 DX	9	17	8	7	1.7	17	99	44	545
●	S602116.TG10X1001SX	112	140	68	50.5	28	10	M10 DX	M10 SX	9	17	8	7	1.7	17	99	44	545

S602TG10

SPOOL HOLDER WITHOUT STUD FOR MIG/MAG WELDING WIRE COIL

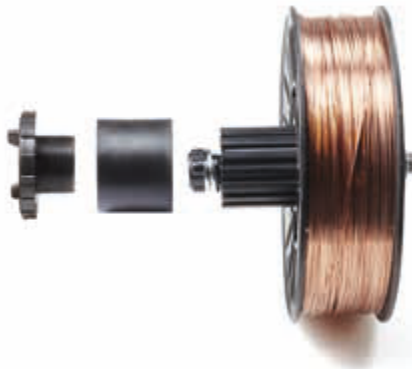

Attention:
It is possible to mount a wire coil with width L=55 on the large spool holder S602116, interposing spacer bush S604 between the coil and the fixing ring nut.

Attention: S602-116 TG10 can only be used with plastic coils with:
Internal hole: \varnothing 53 mm
Width: \varnothing 100 mm



S602116 TG10 + S604

Attention: S602-74 TG10 can only be used with plastic coils with:
Internal hole: \varnothing 53 mm
Width: 55 mm

