

T410M



FERRITE ROUND DISC MAGNET WITH STEEL SHELL AND THREADED THROUGH HOLE

Materials:

- (1) Turned free-cutting steel shell with threaded through hole (thread tolerance 6H).
- (2) Flat ferrite magnet.
- (3) Plastic spacer.

Surface finish:


Smooth.

Colour:

Standard blue galvanising.

Special requests:

- Upon request and for special quantities the steel shell of model T410M can be supplied black galvanised (720h salt spray resistance).

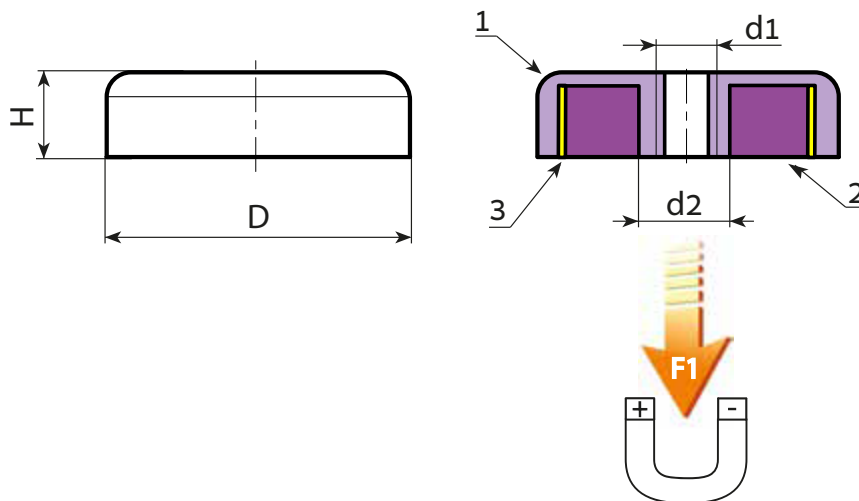

Stock availability as % (🛒)
90% (●) - 40% (●) - 5% (●)

🛒	art.	D	H +0,5/-0,2	d2	d1 _{6H}	g	F1 (N)
●	T410025.VZM04	25±0,1	7	5,2	M4	18	36
●	T410032.VZM04	32±0,1	7	5,2	M4	29	75
●	T410040.VZM04	40+0,2/-0,1	8	5,2	M4	53	90
●	T410050.VZM06	50+0,2/-0,1	10	12	M6	94	170
●	T410050.VZM08	50+0,2/-0,1	10	12	M8	94	170
●	T410063.VZM08	63+0,3/-0,1	14	13	M8	206	290
●	T410080.VZM08	80+0,3/-0,1	18	14,5	M8	472	550
●	T410080.VZM10	80+0,3/-0,1	18	14,5	M10	466	550