

W805



PA6
+G.F.

Aisi
303

C40

UL94
HB



KNOB WITH STEEL INDEXING PLUNGER WITHOUT RING NUT - WITH LOCK NUT

Materials:

- (3) Stainless steel spring (Aisi 301).
- (4) Reinforced polyamide lobed knob. Cannot be disassembled. Resistant to oils and greases.

W805:

- (2) Threaded high-resistance steel body with seat for key.
- (1) Hardened high resistance steel plunger pin.
- (5) Threaded steel lock nut (UNI 5589).

W805CIN:

- (2) Threaded stainless steel body (Aisi 303), with seat for key.
- (1) Stainless steel plunger pin (Aisi 303).
- (5) Threaded stainless steel lock nut (Aisi 304) (UNI 5589).

Surface finish:

- (4) Satin.
- (1-2-5) Smooth.

Colour:

- (4) Black (RAL 9011).

W805:

- (1-2) Black-oxide treated.

W805CIN:

- (1-2) Natural.

Locking key:


Upon request the locking key with article code W807 is available.

ATTENTION:

- > We recommend an H7 tolerance for the plunger stem bore.
- > The nut is supplied assembled.

Special Requests:

- On request and for special quantities the knob can be supplied in the colours indicated in the table [page].
- Upon request locking keys are available.
- On request the nut can be supplied disassembled.

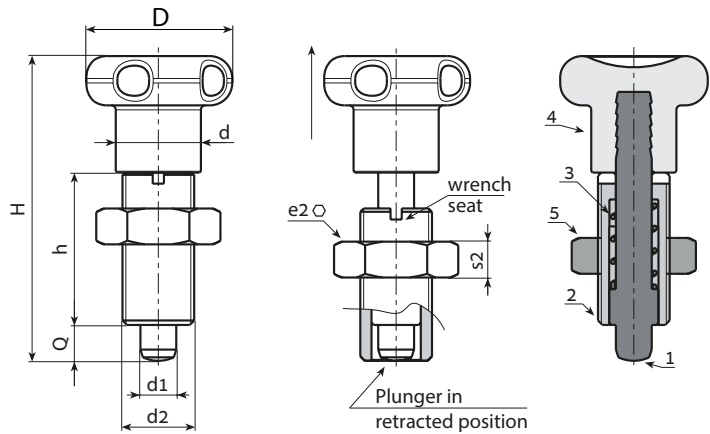

Stock availability as % (🛒)
90% (●) - 40% (●) - 5% (●)

Version W805 - black-oxide treated steel

🛒	Art.	D	H	h	d2	d	e2	s2	d1 -0,02 -0,04	Q	📦	Key
●	W805.Q0501	22	45	22	M10x1	12	17	6	5	5	23	W807.05
●	W805.Q0601	27	54	26	M12x1,5	14	19	7	6	6	38	W807.06
●	W805.Q0801	33	68	34	M16x1,5	19	24	8	8	8	82	W807.08
●	W805.Q1001	33	79	43	M20x1,5	19	30	9	10	10	133	W807.10

Version W805 CIN - stainless steel (Aisi 303)

INOX

🛒	Art.	D	H	h	d2	d	e2	s2	d1 -0,02 -0,04	Q	📦	Key
●	W805.I0501CIN	22	45	22	M10x1	12	17	6	5	5	23	W807.05
●	W805.I0601CIN	27	54	26	M12x1,5	14	19	7	6	6	38	W807.06
●	W805.I0801CIN	33	68	34	M16x1,5	19	24	8	8	8	82	W807.08
●	W805.I1001CIN	33	79	43	M20x1,5	19	30	9	10	10	133	W807.10



Arbel Agencies LTD.
11 Ba'alei Hamelacha st. Qiryat Bialik P.O.B 1095, ZIP 2751311, ISRAEL
+972(0)48736969 ☎ +972(0)48730708 📠 info@arbel-ltd.com 📧 www.arbel-ltd.com 🌐

