

# W815

## LEVER LOCKING STEEL INDEXING PLUNGER



Aisi 303

C40



### Materials:

(3) Lever in die-cast zamak.

### W815:

- (1) Hardened high resistance steel plunger pin.
- (2) Threaded turned high-resistance steel body with seat for locking position.
- (5) Galvanised steel spring.

### W815CIN:

- (1) Stainless steel plunger pin (Aisi 303).
- (2) Threaded turned high-resistance stainless steel body (Aisi 303) with seat for locking position.
- (5) Stainless steel spring (Aisi 301).

### Surface finish:

- (3) Satin.
- (1-2) Smooth.

### Colour:

(3) Epoxy powder coated, black (RAL 9011).

W815: (1-2) Black-oxide treated.

W815CIN: (1-2) Natural.

### ATTENTION:


> We recommend an H7 tolerance for the plunger stem bore.

### Special Requests:

- Upon request and for special quantities the plunger thread can be supplied with standard coarse pitch.



To lock the plunger in retracted position turn the lever by 180° and raise it until it snaps into the special groove.

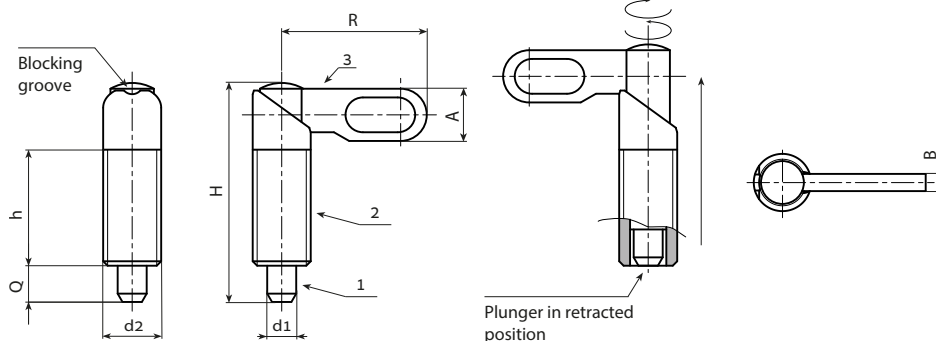

Stock availability as % (🛒)  
90% (●) - 40% (●) - 5% (●)

### Version W815 - black-oxide treated steel

🛒	Art.	R	H	h	A	B	d2	d1 -0,02 -0,04	Q	g
●	W81510.V04	25	38	20	9	3	M10x1	4	6	18
●	W81510.V05	25	38	20	9	3	M10x1	5	6	19
●	W81510.V06	25	38	20	9	3	M10x1	6	6	21
●	W81512.V05	30	47	25	11	3.5	M12X1,5	5	8	30
●	W81512.V06	30	47	25	11	3.5	M12X1,5	6	8	30
●	W81512.V08	30	47	25	11	3.5	M12X1,5	8	8	33
●	W81516.V06	40	60,5	32	14,5	5	M16x1,5	6	10	73
●	W81516.V08	40	60,5	32	14,5	5	M16x1,5	8	10	75
●	W81516.V10	40	60,5	32	14,5	5	M16x1,5	10	10	77
●	W81520.V08	50	70	35	18	6	M20x1,5	8	12	137
●	W81520.V10	50	70	35	18	6	M20x1,5	10	12	173
●	W81520.V12	50	70	35	18	6	M20x1,5	12	12	143

### Version W815 CIN - stainless steel (Aisi 303)

INOX

🛒	Art.	R	H	h	A	B	d2	d1 -0,02 -0,04	Q	g
●	W81510.I04CIN	25	38	20	9	3	M10x1	4	6	18
●	W81510.I05CIN	25	38	20	9	3	M10x1	5	6	19
●	W81510.I06CIN	25	38	20	9	3	M10x1	6	6	21
●	W81512.I05CIN	30	47	25	11	3.5	M12X1,5	5	8	30
●	W81512.I06CIN	30	47	25	11	3.5	M12X1,5	6	8	30
●	W81512.I08CIN	30	47	25	11	3.5	M12X1,5	8	8	33
●	W81516.I06CIN	40	60,5	32	14,5	5	M16x1,5	6	10	73
●	W81516.I08CIN	40	60,5	32	14,5	5	M16x1,5	8	10	75
●	W81516.I10CIN	40	60,5	32	14,5	5	M16x1,5	10	10	77
●	W81520.I08CIN	50	70	35	18	6	M20x1,5	8	12	137
●	W81520.I10CIN	50	70	35	18	6	M20x1,5	10	12	142
●	W81520.I12CIN	50	70	35	18	6	M20x1,5	12	12	143

Arbel Agencies LTD.



11 Ba'alei Hamelacha st. Qiryat Bialik P.O.B 1095, ZIP 2751311, ISRAEL  
+972(0)48736969 ☎ +972(0)48730708 📠 info@arbel-ltd.com 📧 www.arbel-ltd.com 🌐

