


## **AC1016** AIRCOMPRESSOR

## **SPECIFICATIONS**


Rated Pressure: **Rated Airflow:** Rated Voltage (s): Maximum Pressure: **Rated Frequency: Power Consumption:** Duty Cycle: **Coil insulation Class:** Noise Level: **Environmental Conditions: Mounting Dimensions:** Unit outside dimensions: Gross Weight: Lead Wire Length:\* Outlet:\*

50kPa (500 mB, 7.24psi) >2.5 l/min (0.88cfm) 230V >95 kPa (950mB, 13.75psi) 50Hz 14-15 Watts Continuous Class F. Class B for UL (1450) (120V) Below 40 dB (A) 0°C - 40°C & 35% - 85% RH 48(L) x 62(W) mm 90mm x 58mm x 58mm 700grams (1.54lbs) AWG22 (UL1015, 105°C) X 260mm 7.5mm diameter bard, hose nipple.





\*Example given. Customer determined attributes are available. Patented and patents pending

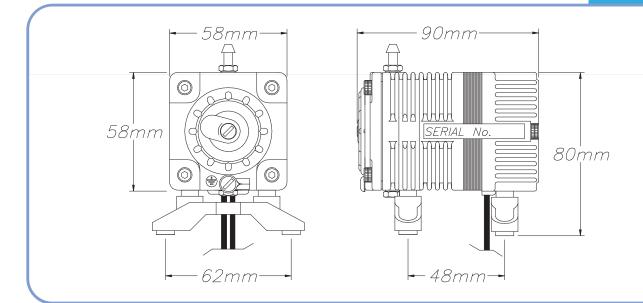

Contact technical sales for additional information regarding life expectancy and operating conditions. All the information in this datasheet is supplied in good faith. This information is given without obligation or liability.



Arbel Agencies LTD.

+972(0)48736969 🖄

11 Ba'alei Hamelacha st. Qiryat Bialik P.O.B 1095, ZIP 2751311, ISRAEL info@arbel-ltd.com 🖂 +972(0)48730708 📾