

LC1211 AIRCOMPRESSOR LOWVOLTAGE

SPECIFICATIONS


Rated Voltage (s):	DC 12 Volts Pulsed
Voltage characteristic:	On 5ms, Off 15ms
Rated Pressure:	150 kPa
Rated Airflow:	0.5 l/min
Maximum Pressure:	>300kPa
Rated Frequency:	50Hz
Power Consumption Max (DC):	30 VA
Duty Cycle:	Continuous
Coil insulation Class:	Class F
Environmental Conditions:	0°C - 40°C & 35% -
Mounting Dimensions:	48(L) x 62(W) mm
Unit outside dimensions:	90mm x 58mm x 58
Gross Weight:	700grams (1.54lbs)
Lead Wire Length:*	AWG22 (UL1015, 10
Outlet:*	4mm hose elbow ac


IFF 15ms & 35% - 85% RH (W) mm 8mm x 58mm (1.54lbs) L1015, 105°C) X 260mm elbow adaptor.

*Example given. Customer determined attributes are available. Patented and patents pending



Images are for reference only



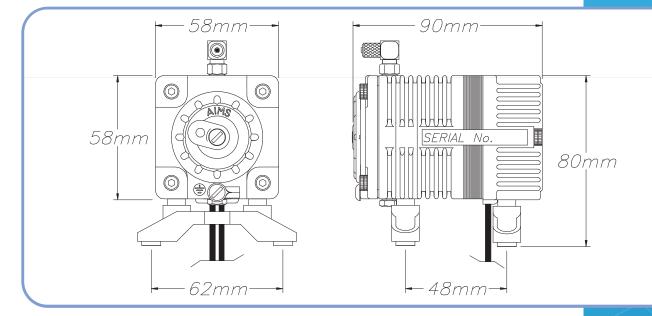

Contact technical sales for additional information regarding life expectancy and operating conditions. All the information in this datasheet is supplied in good faith. This information is given without obligation or liability.



Arbel Agencies LTD.

+972(0)48736969 😒

11 Ba'alei Hamelacha st. Qiryat Bialik P.O.B 1095, ZIP 2751311, ISRAEL info@arbel-ltd.com 🖂 +972(0)48730708 📠