

www.koolance.com
Specifications Sheet


Generated: 2019-07-14

P/N: ALX-1450-P400

ALX-1450-P400 Modular Liquid Cooling System (Rev.2.0)








This version includes the RPM-ALX400 and HXM-ALX1450 modules. These are quickly combined during installation, and <u>individually upgradeable</u> if requirements later change. The front "RPM" contains the pump, reservoir, electronics, and sensors. The rear "HXM" houses the heat exchanger, fans, and flow meter.

A USB port is integrated for viewing and logging of temperature and sensor data using the <u>Koolance System Monitor</u> application. Rev.2.0 ALX systems add software control options for temperature set point, alarm, trigger relay,



- Cooling capacity: 1450W (4948BTU/hr) with 25°C liquid-ambient delta @ 5.3LPM
- Temperature in °C/°F with set-point based on: liquid (-30 to 90°C), or one of two optional K-type thermocouples (-20 to 120°C)
- Pump: 10 manual levels, up to 5.3LPM (1.4GPM)
- Select only values you want displayed on the front 2-line OLED display (fixed or rotating)
- Show coolant flow rate in LPM/GPM
- Show pump impeller speed in RPM
- Show radiator fan speed in RPM
- Enable audio alarm based on: temperature, flow rate, and/or reservoir coolant level
- Enable relay trigger (NO or NC) based on: temperature, flow rate, and/or reservoir coolant level
- Power input: 12VDC, 73W or higher
- Reservoir capacity: 400ml (13.5 fl oz)
- 1/4 NPT threads on back for fittings

NOTE: Requires 12VDC input power. Koolance offers a separate threads on rear of the cooling system are NPT 1/4-inch.

power supply for AC wall outlet sources. Inlet/outlet fitting


General					
Weight	10.20 lb (4.63 kg)				
Fitting Thread	NPT 1/4				
Max Pressure @ 25°C	2kgf/cm2 (28.5psi)				
Max Temperature	60°C (140°F)				
Noise (dBA)	30-61				
Cooling Systems					
Cooling Capacity	1450W (4948BTU/hr) @ 25°C liquid-ambient (25°C dT)				
Display Type	OLED				
Flow Rate	5.3LPM (1.4GPM)				






General					
Max Power Consumption	73W				
Power Source	12 VDC				
Radiator	Brass/Copper, 2 x 120mm fans				
Temperature Sensors	Liquid & Two K-Type Thermocouples (optional)				
Temperature Stability	+/-0.5°C				

ALX Systems  $(\Delta T = Inlet \ Water - Ambient = 25 ^{\circ}C)$ 

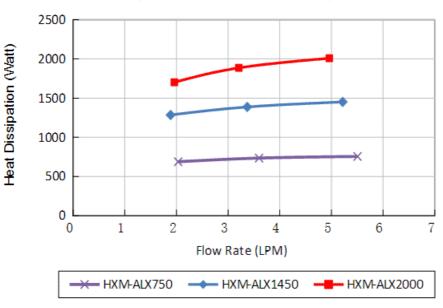


ALX Systems ( $\Delta T$  = Inlet Water - Ambient = 25°C)

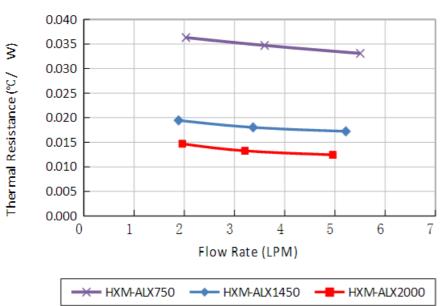





## **ALX System Pump Output**

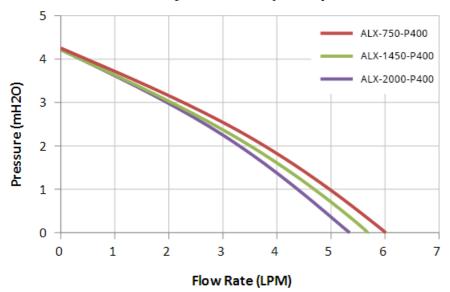











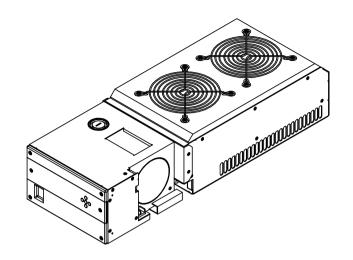




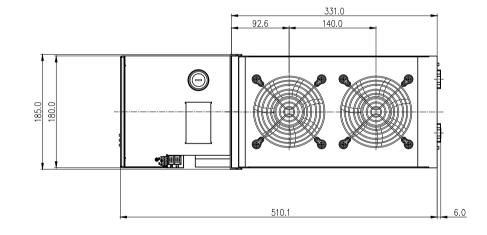

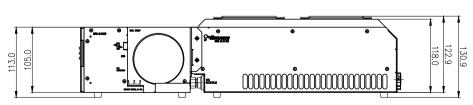







NO.	DISCRIPTION				MA	TER'L	QUANTITY REM		REMA	ARKS
<b>?•</b> KOOLANCE					UNIT	ММ	ITEM	ITEM ALX-1450-P400		
	ВУ	ВУ		APPRO BY	SCALE	N/S	TITLE	۸,		
DATE	- 51	- 51			3RD ANGLE			Ass'y		
	S.J.LE				CODE NO.		DWG.	i. NO.		PAGE
					1					

