


QD2H Male Quick Disconnect No-Spill  
 Coupling, Panel Barb for ID 06mm (1/4in)




Koolance patented quick disconnect no-spill coupling with automatic shutoff. 6mm (1/4in) ID male panel-mountable hose barb with clamp for 10mm (3/8in) OD. It will only fit a Koolance QD2H female quick disconnect.


After pulling the ring on the female QDC side, the quick-disconnect fittings will separate. Liquid on both sides will be automatically obstructed with approximately 0.2ml freed. Coolant volume lost upon disconnection will rise with internal pressure higher than 10kgf/cm<sup>2</sup> (142psi).

Intended Tubing Size  
 ID: 6mm (1/4")  
 OD: 10mm (3/8")  
 Wall: 2mm (5/64")





General	
Weight	0.08 lb (0.04 kg)
Materials	Nickel-Plated Brass, Stainless Steel, EPDM
Max Pressure @ 25°C	12kgf/cm <sup>2</sup> (170.7psi)
Max Temperature	100°C (212°F)

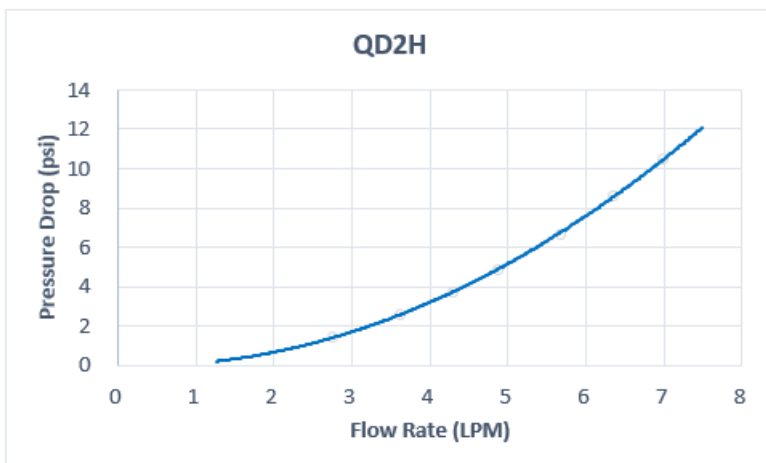

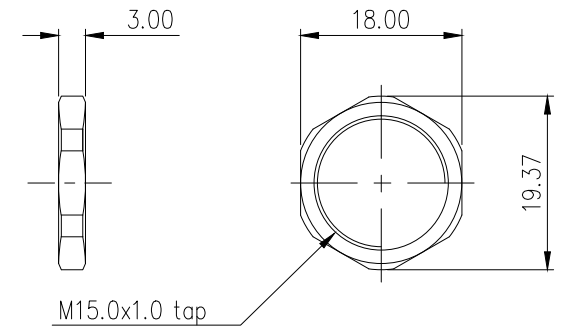

NUT DIMENSION

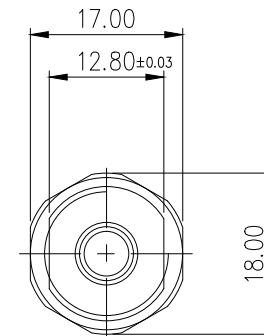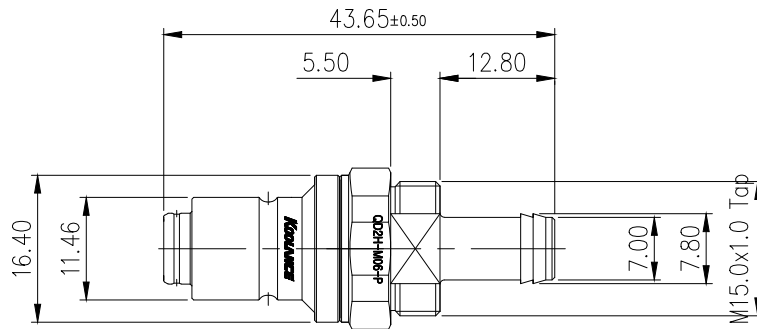

REV	DATE	CONTENTS	APPD BY

NO.	DESCRIPTION	MATER'L		QUANTITY	REMARKS
		UNIT	MM	PART NO.	QD2H-M06-P
		SCALE	N/S	TITLE	DIMENSION
DATE	BY	BY	BY	APPRD BY	3RD ANGLE
	song				DWG. NO.
					ITEM
					QD2H