


QD2H Male Quick Disconnect No-Spill
 Coupling, Male Threaded G 1/4 BSPP



Koolance patented quick disconnect no-spill coupling with automatic shutoff. G 1/4 BSPP (parallel) thread male fitting for screwing directly into a water block or other component. It will only fit a Koolance QD2H female quick disconnect.


After pulling the ring on the female QDC side, the quick-disconnect fittings will separate. Liquid on both sides will be automatically obstructed with approximately 0.2ml freed. Coolant volume lost upon disconnection will rise with internal pressure higher than 10kgf/cm² (142psi).

| General | |
|---------------------|--|
| Weight | 0.08 lb (0.04 kg) |
| Fitting Thread | G 1/4 BSPP |
| Materials | Nickel-Plated Brass, Stainless Steel, EPDM |
| Max Pressure @ 25°C | 12kgf/cm ² (170.7psi) |
| Max Temperature | 100°C (212°F) |

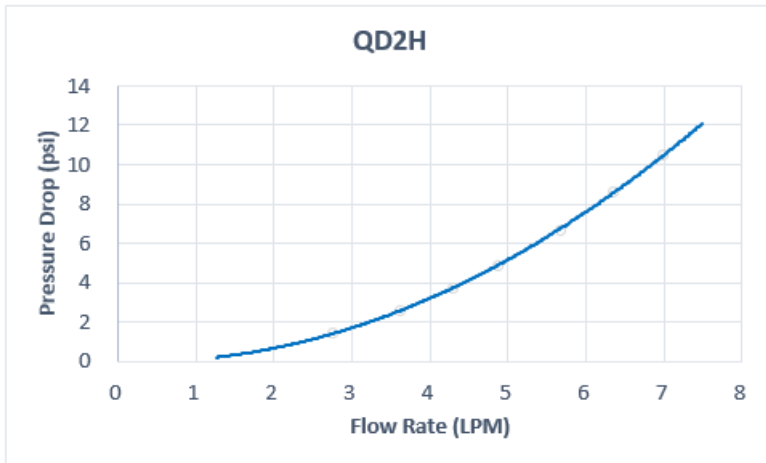



Arbel Agencies LTD.
 11 Ba'alei Hamelacha st. Qiryat Bialik P.O.B 1095, ZIP 2751311, ISRAEL
 +972(0)48736969 ☎ +972(0)48730708 📠 info@arbel-ltd.com ✉ www.arbel-ltd.com 🌐

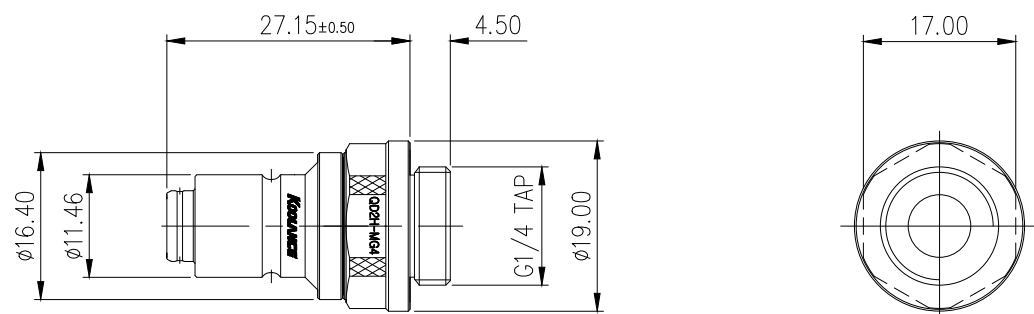

| REV | DATE | CONTENTS | APPD BY |
|-----|------|----------|---------|
| | | REVISION | |

| NO. | DESCRIPTION | MATER'L | QUANTITY | REMARKS |
|-----|------------------------|------------|-------------------|---------|
| | Koolance | UNIT: MM | PART NO. QD2H-MG4 | |
| | BY: BY: BY: APPROV BY: | SCALE: N/S | TITLE: DIMENSION | |
| | DATE: song | 3RD ANGLE | ITEM: QD2H | |
| | | DWG. NO. | | |