

Y379

NEW

+200°
-20°

**39
NiCr**

**Aisi
304**

**RoHS
COMPLIANT**

DIN ISO 7379 - SHOULDER SCREW

Materials:

Y379:

Untreated steel with strength class 12.9.

Y379 CIN:

Untreated stainless steel (Aisi 304).

Surface finish:

Smooth.

Colour:

Y379:

Black-oxide treated.

Y379 CIN:


Natural.

Processing:

Ground stud (tolerance f9), partially threaded (tolerance 6g) with hexagon socket head.

Special requests:

- None.

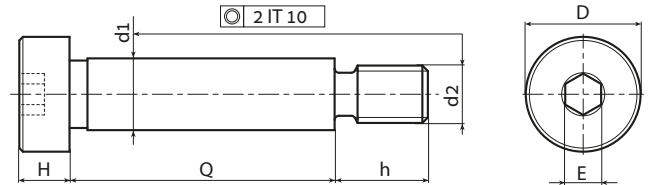

Version Y379 - black-oxide treated steel



Stock availability as % (🛒)
90% (●) - 40% (●) - 5% (●)

art.	D	d2 6g	H	h	E	d1 f9	Q	g
Y37904.SBM03X..	7	M3	3	7	2	4	06-08-10-12-16-20	1,6-1,8-2,2-2,5-3
Y37905.SBM04X..	9	M4	4	8	2,5	5	08-10-16-20-30-40	3,6-3,8-4,8-5,3-6,7-8,8
Y37906.SBM05X..	10	M5	4,5	9,5	3	6	16-20-25-30-40-50-60	6,9-7,7-8,9-10-10,4-14-16,5
Y37908.SBM06X..	13	M6	5,5	11	4	8	16-20-25-30-40-50-60	12,8-14,3-16,3-18-22-26-30
Y37910.SBM08X..	16	M8	7	13	5	10	16-20-25-30-40-50-60-70-80	23-25-28-31-38-44-50-56-62
Y37912.SBM10X..	18	M10	9	16	6	12	16-20-25-30-40-50-60-70-80-90-100	36-40-45-50-55-65-75-85-93-102-112
Y37916.SBM12X..	24	M12	11	18	8	16	30-40-50-60-70-80-90-100-120	92-108-124-140-156-171-186-203-233
Y37920.SBM16X..	30	M16	14	22	10	20	30-40-50-60-70-80-90-100-120	167-193-218-242-266-290-315-340-389

Enter the selected stud length in place of the two dots . . in the item code.

Version Y379 CIN - stainless steel (Aisi 304)

INOX

art.	D	d2 6g	H	h	E	d1 f9	Q	g
Y37904.INM03X..CIN	7	M3	3	7	2	4	06-08-10-16-20	1,6-1,8-2,2-2,5-3
Y37905.INM04X..CIN	9	M4	4	8	2,5	5	08-10-16-20-30-40	3,6-3,8-4,8-5,3-6,7-8,8
Y37906.INM05X..CIN	10	M5	4,5	9,5	3	6	16-20-25-30-40-50-60	6,9-7,7-8,9-10-10,4-14-16,5
Y37908.INM06X..CIN	13	M6	5,5	11	4	8	16-20-25-30-40-50-60	12,8-14,3-16,3-18-22-26-30
Y37910.INM08X..CIN	16	M6	7	13	5	10	16-20-25-30-40-50-60-70-80	23-25-28-31-38-44-50-56-62
Y37912.INM10X..CIN	18	M10	9	16	6	12	16-20-25-30-40-50-60-70-80-90-100	36-40-45-50-55-65-75-85-93-102-112
Y37916.INM12X..CIN	24	M12	11	18	8	16	30-40-50-60-70-80-90-100-120	92-108-124-140-156-171-186-203-233
Y37920.INM16X..CIN	30	M16	14	22	10	20	30-40-50-60-70-80-90-100-120	167-193-218-242-266-290-315-340-389

Enter the selected stud length in place of the two dots . . in the item code.



Arbel Agencies LTD.

11 Ba'alei Hamelacha st. Qiryat Bialik P.O.B 1095, ZIP 2751311, ISRAEL
+972(0)48736969 ☎ +972(0)48730708 📠 info@arbel-ltd.com 🌐 www.arbel-ltd.com 🌐

