


QD4H Female Quick Disconnect No-Spill
 Coupling, Panel Barb for 13mm (1/2in)




Koolance patented quick disconnect no-spill coupling with automatic shutoff. 13mm (1/2in) ID female panel-mountable hose barb with clamp for 16mm OD (5/8in). It will only fit a Koolance QD4H male quick disconnect.




After pulling the ring on the female QDC side, the quick-disconnect fittings will separate. Liquid on both sides will be automatically obstructed with approximately 0.2ml freed. Coolant volume lost upon disconnection will rise with internal pressure higher than 10kgf/cm² (142psi).

Intended Tubing Size
 ID: 13mm (1/2")
 OD: 16mm (5/8")
 Wall: 1.5mm (1/16")



General	
Weight	0.36 lb (0.16 kg)
Materials	Brass, Nickel Plating, Stainless Steel, EPDM
Max Pressure @ 25°C	12kgf/cm ² (170.7psi)
Max Temperature	100°C (212°F)

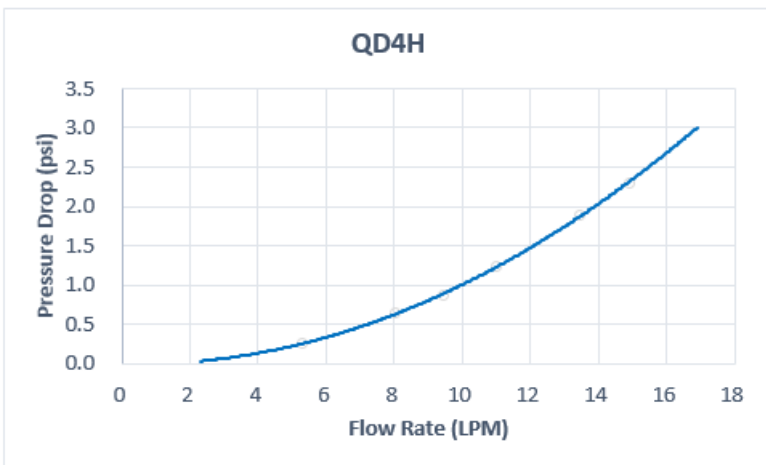

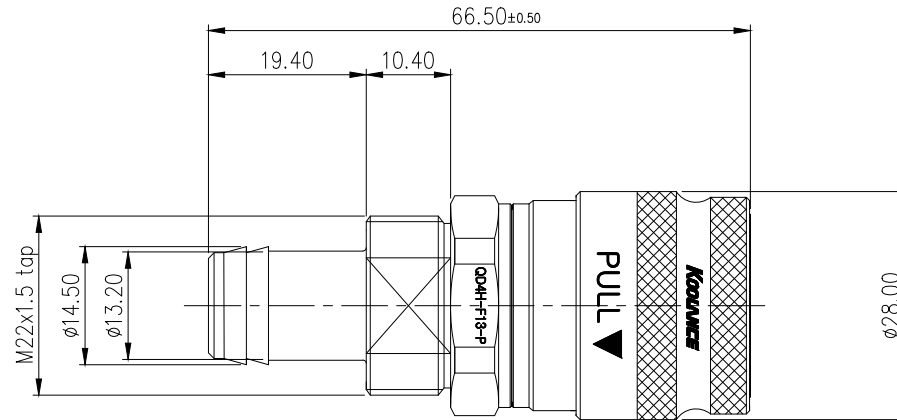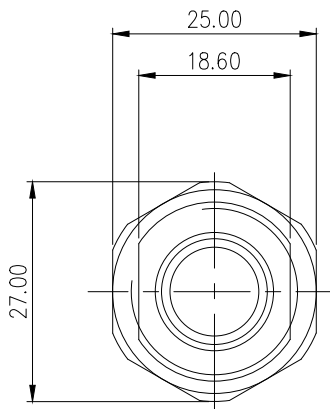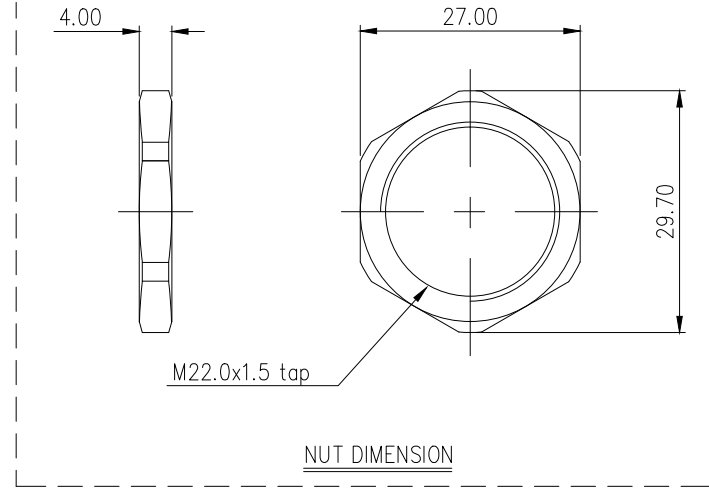

REV	DATE	CONTENTS	APPD BY

NO.	DESCRIPTION	MATER'L	QUANTITY	REMARKS
		UNIT	MM	PART NO. QD4H-F13-P
		SCALE	N/S	TITLE
DATE	BY	BY	BY	BY
3RD ANGLE				DIMENSION
	song			
				ITEM
				QD4H